

Report No.: Poseidon-480

Test Standard: EN 61000-6-3 3M Radiation      Test Distance:

Test item: Radiation Emission      Ant. Polarization: Vertical

Applicant: 深圳创意飞科技有限公司      Temp.(C)/Hum.(%): 25(C) / 60 %

Product: 防水无人机      Power Rating: DC 6V

Model No.: Poseidon-480      Test Engineer: Bowen


Test Mode: ON

Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	169.1053	-7.13	49.13	42.00	40.00	2.00	QP			F	
2	706.6999	2.23	45.59	47.82	47.00	0.82	peak			F	
3	468.8762	-0.84	40.86	40.02	47.00	-6.98	peak			P	
4	373.3112	-2.66	43.29	40.63	47.00	-6.37	peak			P	
5	387.9919	-2.44	42.10	39.66	47.00	-7.34	peak			P	
6	665.8034	1.75	39.34	41.09	47.00	-5.91	peak			P	

Note: Level=Reading+Factor.

Margin=Limit-Level.

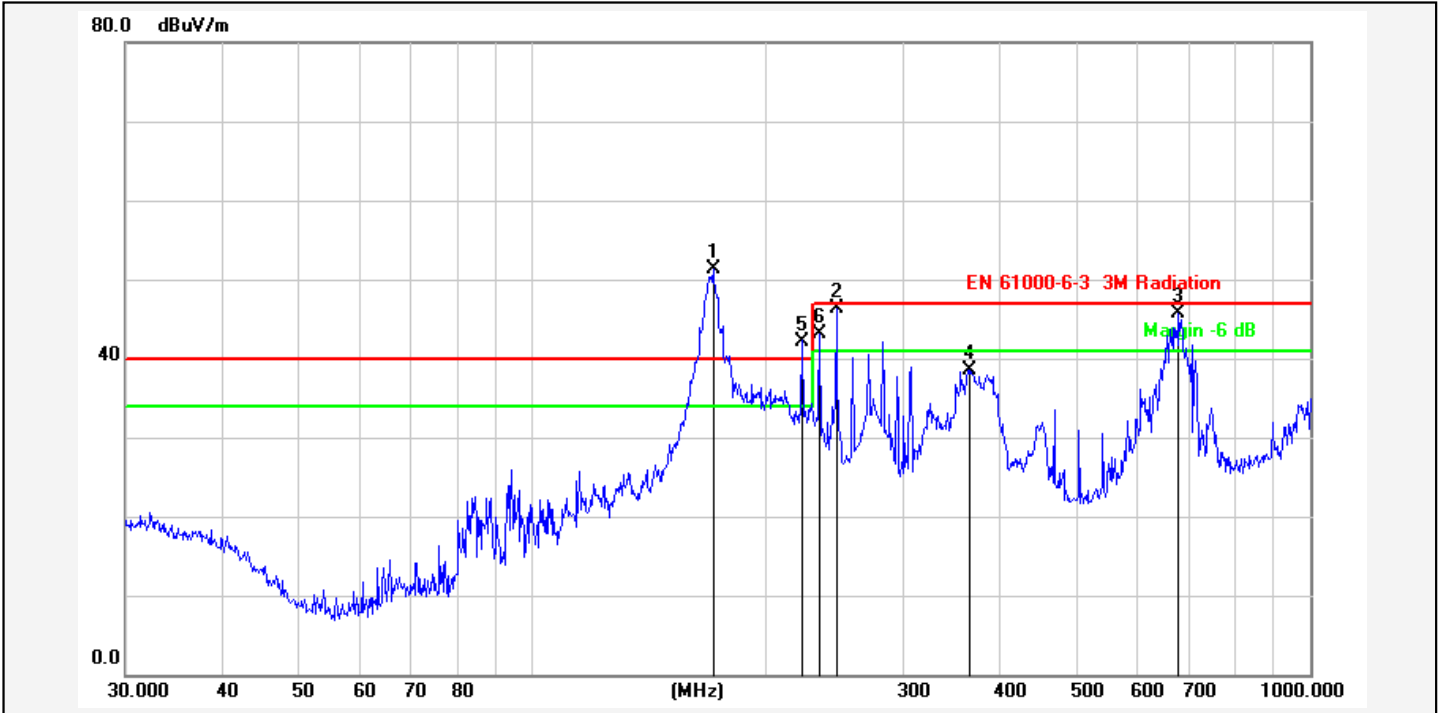

Report No.: Poseidon-480

Test Standard: EN 61000-6-3 3M Radiation

Test item: Radiation Emission

Applicant: 深圳创意飞科技有限公司

Product: 防水无人机

Model No.: Poseidon-480

Test Distance:

Ant. Polarization: Horizontal

Temp.(C)/Hum.(%): 25(°C) / 60 %

Power Rating: DC 6V

Test Engineer: Bowen

Test Mode: ON

Remark:

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	170.7926	-7.20	58.41	51.21	40.00	11.21	peak			F	
2	245.9509	-4.45	50.85	46.40	47.00	-0.60	peak			P	
3	677.5798	1.88	43.75	45.63	47.00	-1.37	peak			P	
4	364.2595	-2.79	41.27	38.48	47.00	-8.52	peak			P	
5	222.1697	-6.40	48.60	42.20	40.00	2.20	peak			F	
6	234.1683	-5.41	48.47	43.06	47.00	-3.94	peak			P	

Note: Level=Reading+Factor.

Margin=Limit-Level.